



الأضواء
AL ADWAA
For Lighting Fixture



مصنع الأضواء

Al Adwaa Factory Co.

For Lighting Fixtures

تعني رؤية أفضل
A Better Vision

MADE IN CHINA

www.adwaafactorysa.com



AL ADWAA
For Lighting Fixture

High Efficiency LED Strip Lights



FLEXIBLE STRIP COVE LIGHT DOUBLE LINE 12W

AD/S-180D-11MM

DRIVER TYPE

Power Supply	Driver required (Provided)
Cut Section Handling	Use another Driver
Input Voltage	220Vac
Frequency	50/60Hz

PRODUCT PARAMETERS

Power	12W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥70
Luminous Flux	≥1100 lm/m
Efficacy	≥90 lm/w
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~45°C
IP rating	IP65
Lamp Body Material	PVC
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	200mm
Strip Length	50m/Roll
Strip Width	14.8mm
Strip Thickness	7.5mm
Strip Mounting	Non-adhesive

LIGHT SOURCE



LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	180 Pcs
Chips Brand	SANAN



Reference size



Installation Diagram

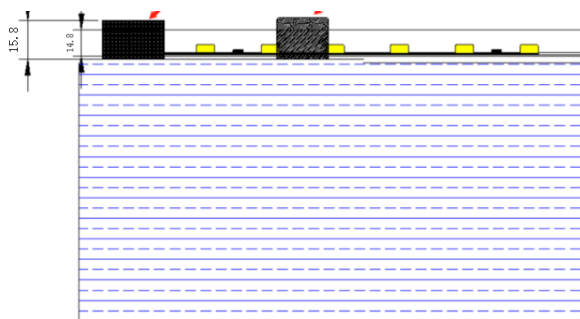

AL ADWAA
For Lighting Fixture

FLEXIBLE NEON STRIP COVE LIGHT 8MM 11W

AD/S-D15-120D-8MM

DRIVER TYPE


Power Supply	Driver required (Provided)
Cut Section Handling	Use another Driver
Input Voltage	220Vac
Frequency	50/60Hz

PRODUCT PARAMETERS


Power	11W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥70
Luminous Flux	≥600 lm/m
Efficacy	≥50 lm/w
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~45°C
IP rating	IP65
Lamp Body Material	PVC
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	200mm
Strip Length	50m/Roll
Strip Width	15mm
Strip Thickness	15mm
Strip Mounting	Non-adhesive

LIGHT SOURCE


LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	120 Pcs
Chips Brand	SANAN

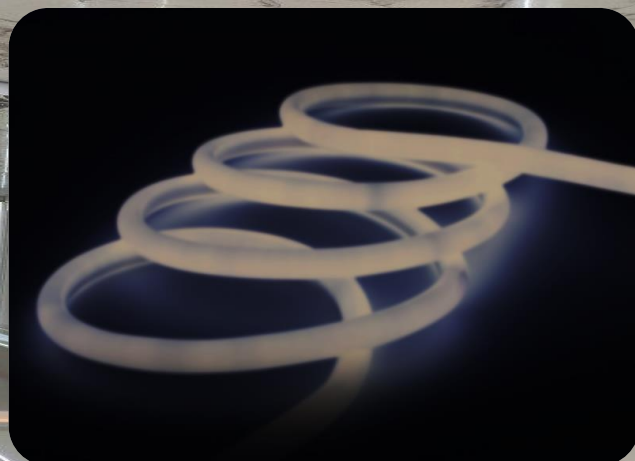

Reference size

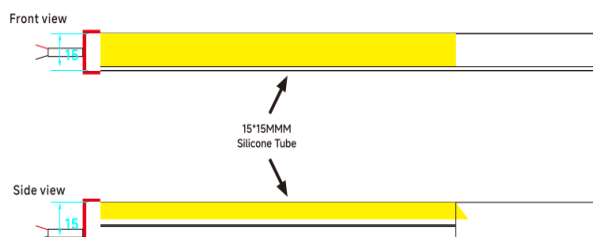

Installation Diagram

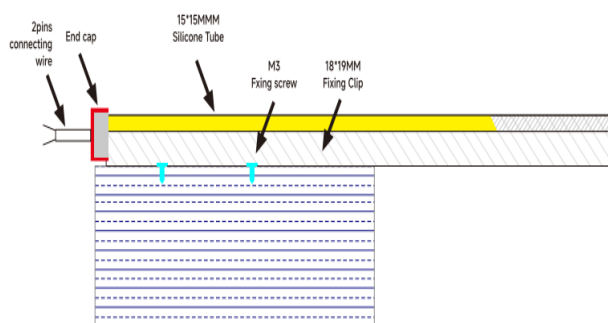

AL ADWAA
For Lighting Fixture

FLEXIBLE STRIP COVE LIGHT 8MM 8W

AD/S-120D-8MM-TAPE

DRIVER TYPE

Power Supply	Driver Not Required (Direct Connection)
Cut Section Handling	Can be reconnected using external wires
Input Voltage	220Vac
Frequency	50/60Hz

PRODUCT PARAMETERS


Power	8W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥70
Luminous Flux	≥800 lm/m
Efficacy	≥90 lm/w
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~45°C
IP rating	IP65
Lamp Body Material	Copper
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	100mm
Strip Length	50m/Roll
Strip Width	10mm
Strip Thickness	4mm
Strip Mounting	Self-adhesive backing

LIGHT SOURCE


LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	120 Pcs
Chips Brand	SANAN



Reference size

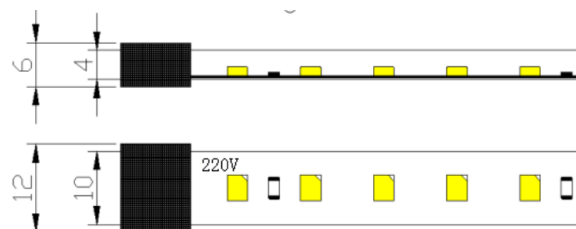

Installation Diagram

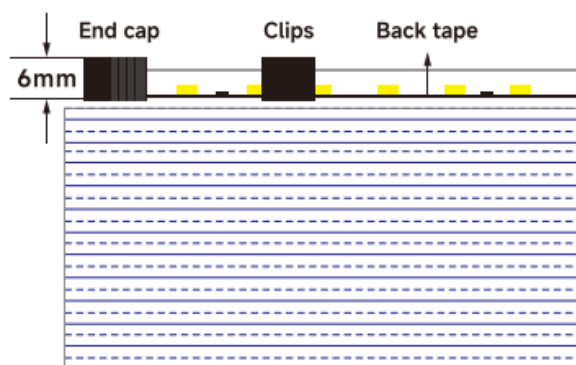

AL ADWAA
For Lighting Fixture

FLEXIBLE STRIP COVE LIGHT DOUBLE LINE 12MM 9W

AD/S-240D-12MM-TAPE

DRIVER TYPE

Power Supply	Driver Not Required (Direct Connection)
Cut Section Handling	Can be reconnected using external wires
Input Voltage	220Vac
Frequency	50/60Hz

PRODUCT PARAMETERS

Power	9W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥70
Luminous Flux	≥850 lm/m
Efficacy	≥95 lm/w
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~45°C
IP rating	IP65
Lamp Body Material	PVC
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	100mm
Strip Length	50m/Roll
Strip Width	13mm
Strip Thickness	4mm
Strip Mounting	Self-adhesive backing

LIGHT SOURCE


LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	240 Pcs
Chips Brand	SANAN



Reference size



Installation Diagram

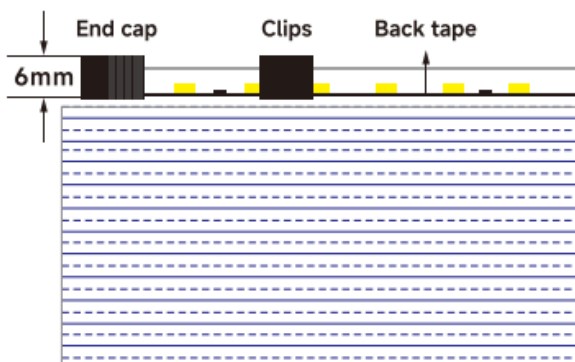

AL ADWAA
For Lighting Fixture

FLEXIBLE STRIP COVE COB LIGHT 8MM 12W

AD/S-COB-320D-8MM

DRIVER TYPE

Power Supply	Driver required (not-Provided)
Cut Section Handling	Use another Driver
Input Voltage	DC 24V

PRODUCT PARAMETERS


Power	12W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥80
Luminous Flux	≥1000 lm/m
Light Effect	≥80 lm/W
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~60°C
IP rating	IP20
Lamp Body Material	PVC
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	50mm
Strip Length	10m/Roll
Strip Width	8mm
Strip Thickness	2mm
Strip Mounting	Self-adhesive backing

LIGHT SOURCE


LED Chips	COB
LED Specifications	3V 60mA
LED Quantity	320 Pcs
Chips Brand	JUSHAN 6*20mil



Reference size

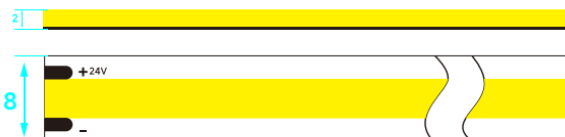

Installation Diagram

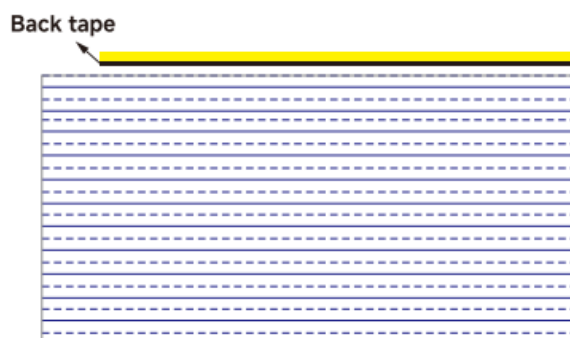

FLEXIBLE STRIP COVE LIGHT 8MM 10W

AD/S-2835-120D-8MM

DRIVER TYPE

Power Supply	Driver required (not-Provided)
Cut Section Handling	Use another Driver
Input Voltage	DC 24V

PRODUCT PARAMETERS


Power	10W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥70
Luminous Flux	≥900 lm/m
Efficacy	≥90 lm/w
SDCM	<5
Life Time	30,000 h
Insulation Voltage	500V
Ta Value	-25~60°C
IP rating	IP20
Lamp Body Material:	PVC
End Cap Material	PVC
Control Method	ON/OFF
Strip cut size	50mm
Strip Length	10m/Roll
Strip Width	8mm
Strip Thickness	1.2mm
Strip Mounting	Self-adhesive backing

LIGHT SOURCE


LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	120 Pcs
Chips Brand	SANAN



Reference size

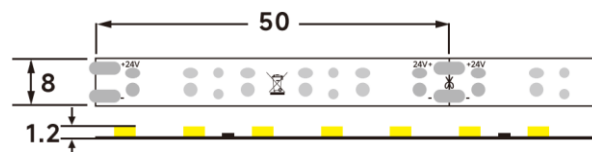

Installation Diagram

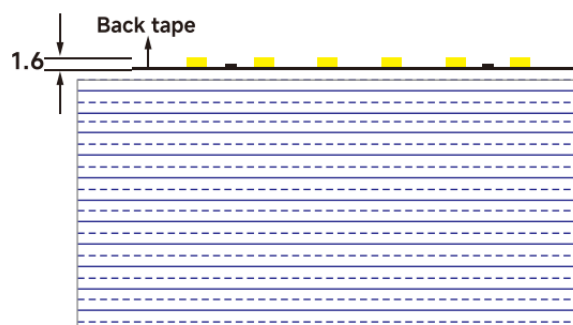

FLEXIBLE STRIP COVE LIGHT 15MM DOUBLE LINE 16W

AD/S-2835-240D-15MM

DRIVER TYPE

Power Supply	Driver required (not-Provided)
Cut Section Handling	Use another Driver
Input Voltage	DC 24V

PRODUCT PARAMETERS


Power	16W/m
Beam Angle	120°
CCT	3000K/4000K/6500K
CRI	≥80
Luminous Flux	≥1500 lm/m
Efficacy	≥90 lm/w
SDCM	<5
Life Time	30000 h
Insulation Voltage	500V
Ta Value	-25~60°C
IP rating	IP20
Lamp Body Material	PVC
End Cap Material:	PVC
Control Method	ON/OFF
Strip cut size	25mm
Strip Length	10m/Roll
Strip Width	15mm
Strip Thickness	1.2mm
Strip Mounting	Self-adhesive backing

LIGHT SOURCE



LED Chips	SMD 2835
LED Specifications	3V 60mA
LED Chips/m	240 Pcs
Chips Brand	SANAN




Reference size

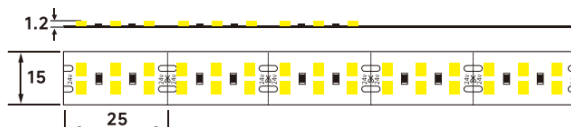

Installation Diagram

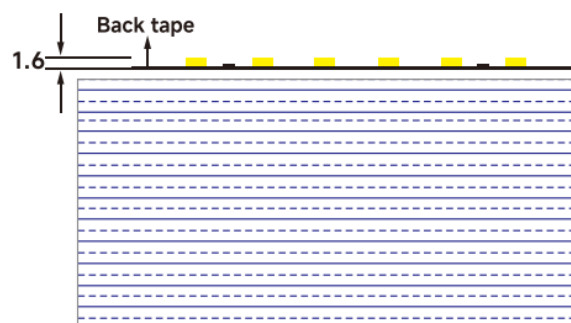

الادواء
AL ADWAA
For Lighting Fixture

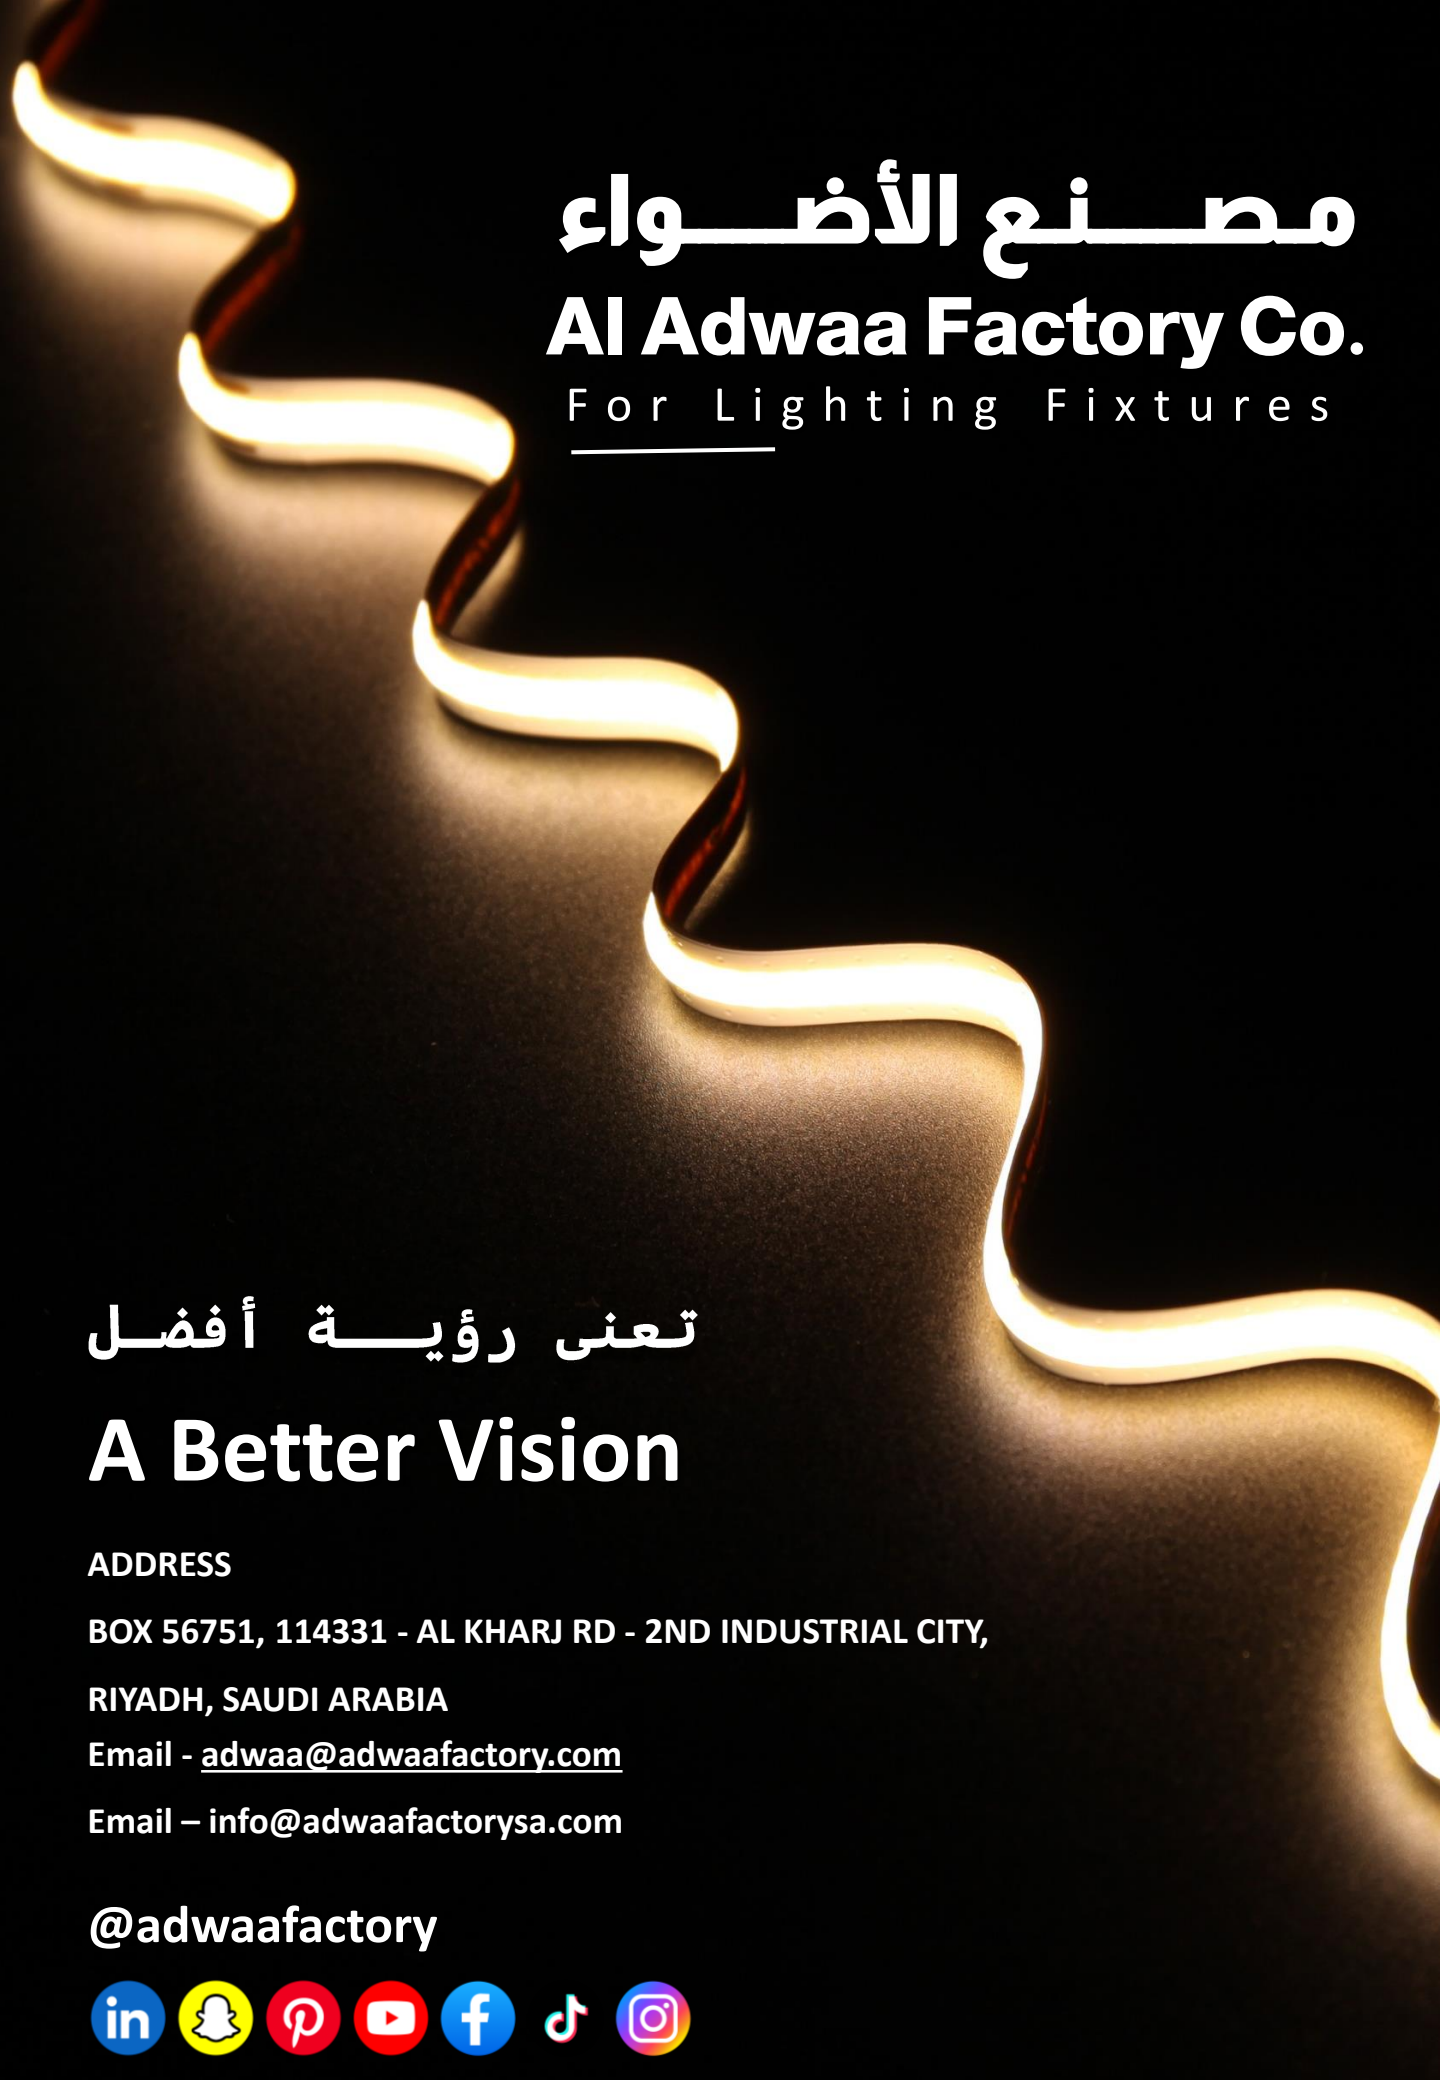

مصنع الأضواء

Al Adwaa Factory Co.

For Lighting Fixtures

تعنى رؤية أفضل

A Better Vision

ADDRESS

BOX 56751, 114331 - AL KHARJ RD - 2ND INDUSTRIAL CITY,
RIYADH, SAUDI ARABIA

Email - adwaa@adwaafactory.com

Email – info@adwaafactorysa.com

@adwaafactory

