




SURFACE MOUNT DIRECT WATER PROOF LUMINAIRE



MODEL: ADI218W/DIR-DS/3400

Classification

IP65

Application

Surface mount LED waterproof lights, designed to provide durable and reliable illumination in wet or humid environments, making them ideal for outdoor areas, bathrooms, kitchens, garages, and other spaces where moisture resistance is essential.

Installation

Surface mount on Wall or Ceiling.


Material

Polycarbonate (PC)

Wiring Type

Single Side
Double Side


Dimension and Mounting Details

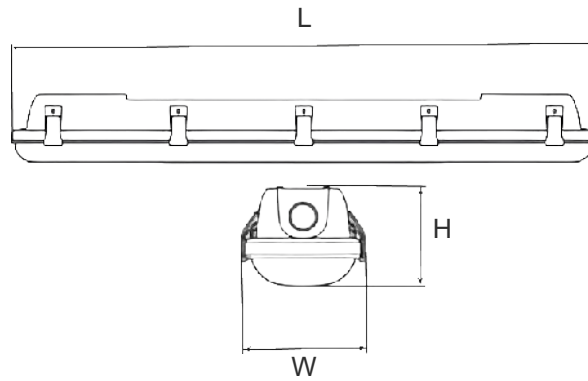

General Specifications

SIZE	L(MM)	W(MM)	H(MM)	WEIGHT(KG)
2X40	1265	125	90	1.650

Light intensity Distribution

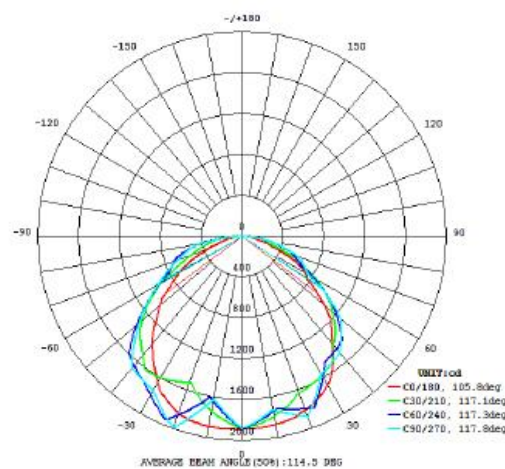

Technical Parameters

	AL ADWAA
Power	DIRECT
Light Source	T8 Tube
Ingress Protection	IP65
Input Voltage, Frequency	AC110-240V, 50/60 Hz
Ambient Temperature (Ta)	-10...50°C
Application	Indoor Use
Emergency Option	Available with emergency pack for minimum 3 hours

GENERAL CHARACTERSTICS

Shape	Rectangular
Diffuser Type	Clear Glass/Frosted
Light Surface Area (cm)	125.7X11.8X4.5
Finish	Matt
Life Time (hours)	30,000h
Switching Cycles	15,000 On / OFF

Ordering Information

Model No.	Power	CBM
ADI218W/DIR-DS/3400	DIRECT	